

Installation Guide: Hydra Motorsport Gauge Rings



TOOLS: (1) Philips screw driver


1. Drop the steering wheel down to its lowest position.
2. Remove the 2 screws securing the hood. They are positions on the top part of the hood.



3. Pull hood from bottom by holding the bottom part and pulling towards you.



4. Remove 3 screws securing cluster to dash.

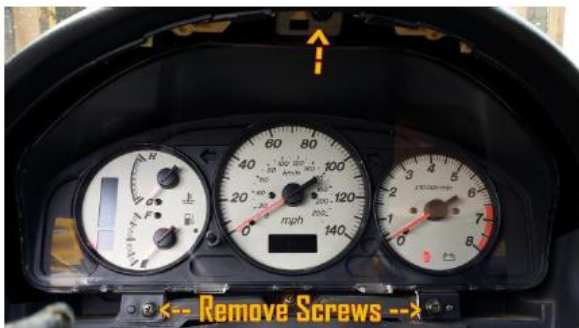

5. Pull the cluster towards you using the silver plate.

! Put a cloth down on the steering column to avoid scratching the clear cluster cover!



6. Unplug the three wiring harnesses from the cluster




7. Remove the Clear cluster cover.

Move to a clean working area and remove the screw holding the metal plate.




Installation Guide: Hydra Motorsport Gauge Rings

8. Push in all the clear tabs in order to release the clear cover.
This can be tricky at first but be patient.

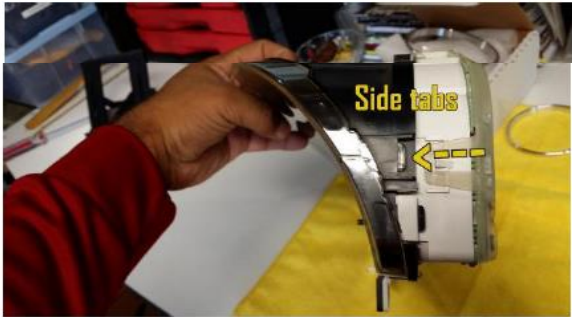

5. Install Hydra Motorsports gauge rings
Press-fit the rings into the cluster.

Hydra Motorsports gauge rings do not require glue.

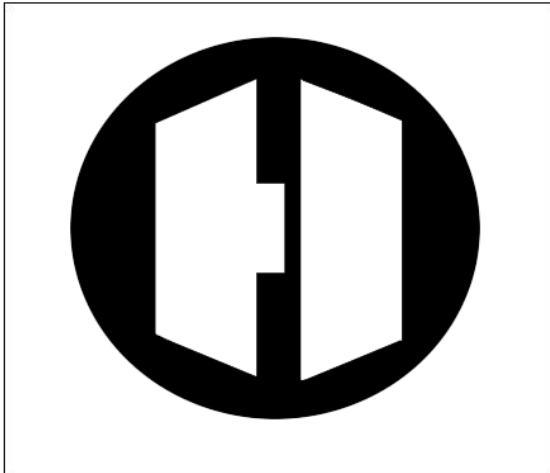

Installation Guide: Hydra Motorsport Gauge Rings

6. Re-install the gauge cluster and hood in reverse order.

Take care not to scratch up the clear cover.